

Robust Object Tracking via Locality Sensitive Histograms

Shengfeng He, *Member, IEEE*, Rynson W.H. Lau, *Senior Member, IEEE*, Qingxiong Yang, *Member, IEEE*, Jiang Wang, Ming-Hsuan Yang, *Senior Member, IEEE*

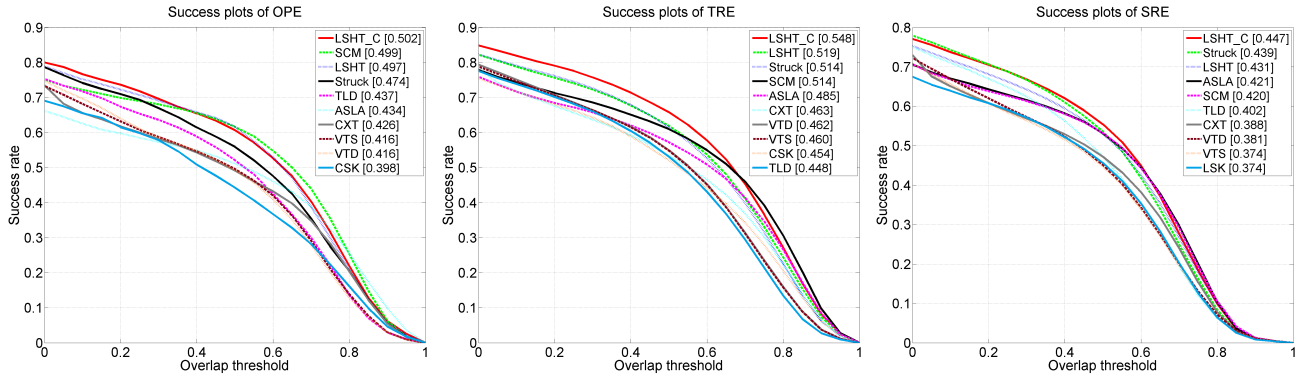


Fig. 1: Overall performances using three different metrics **OPE**, **TRE**, and **SRE**. The average AUC scores are shown in the legends.

Shengfeng He, Rynson W.H. Lau, Qingxiong Yang, and Jiang Wang are with the Department of Computer Science, City University of Hong Kong, Hong Kong. E-mail: shengfeng_he@yahoo.com, {rynsn.lau, qiyang, jiangwang6}@cityu.edu.hk

Ming-Hsuan Yang is with the School of Engineering, University of California, Merced, CA 95344. E-mail: mhyang@ucmerced.edu

Copyright (c) 2015 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending an email to pubpermissions@ieee.org.

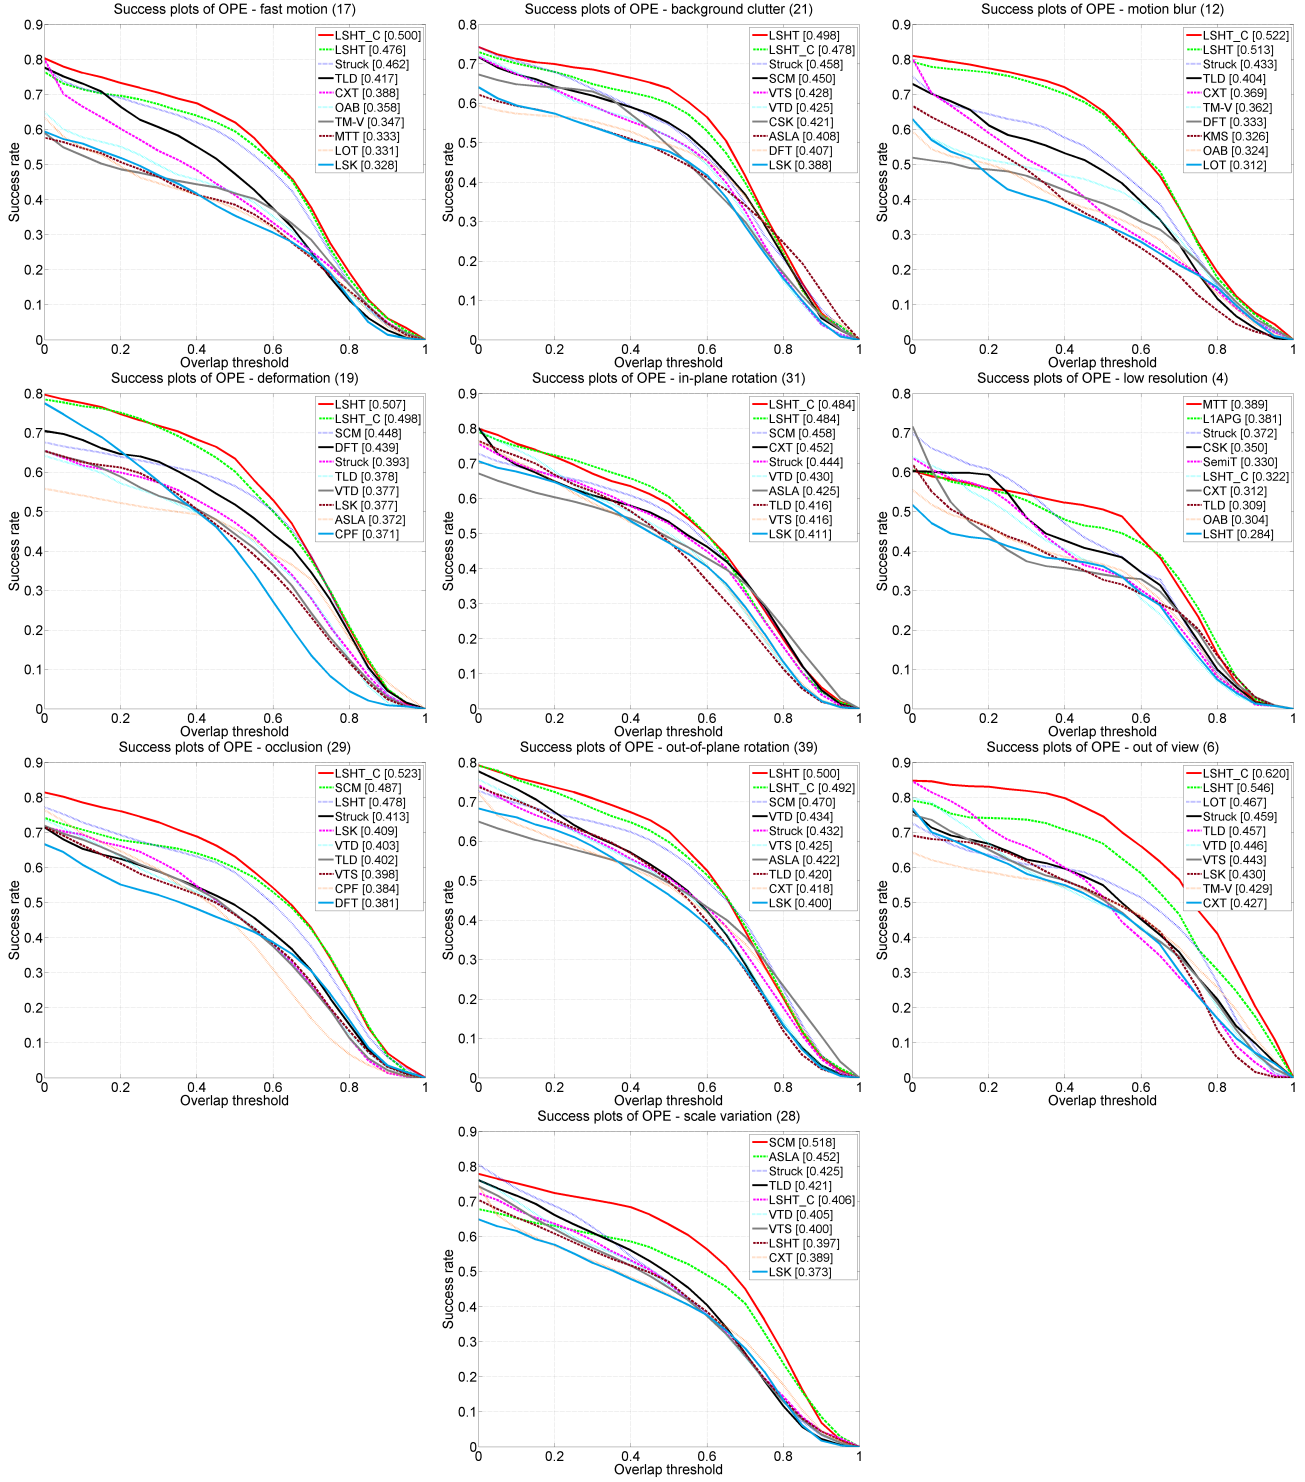


Fig. 2: The OPE plots under 10 challenging factors. The average AUC scores are shown in the legends.

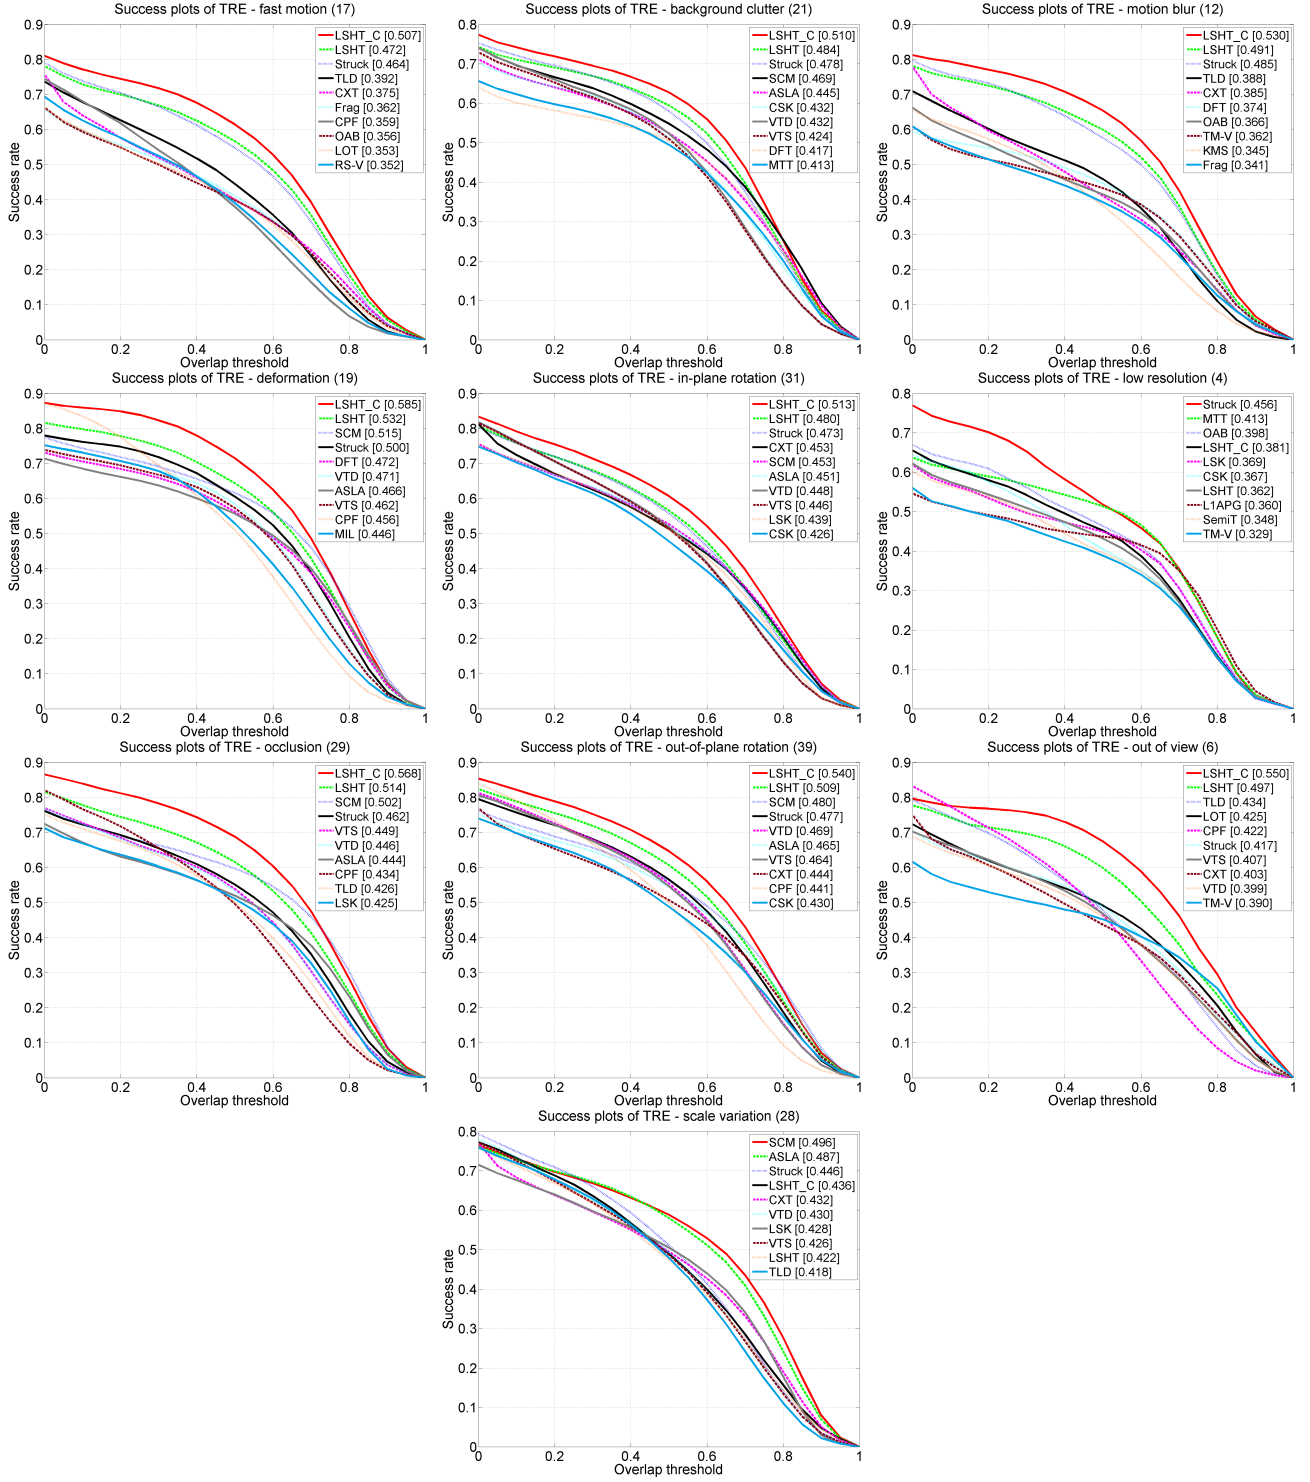


Fig. 3: The TRE plots under 10 challenging factors. The average AUC scores are shown in the legends.

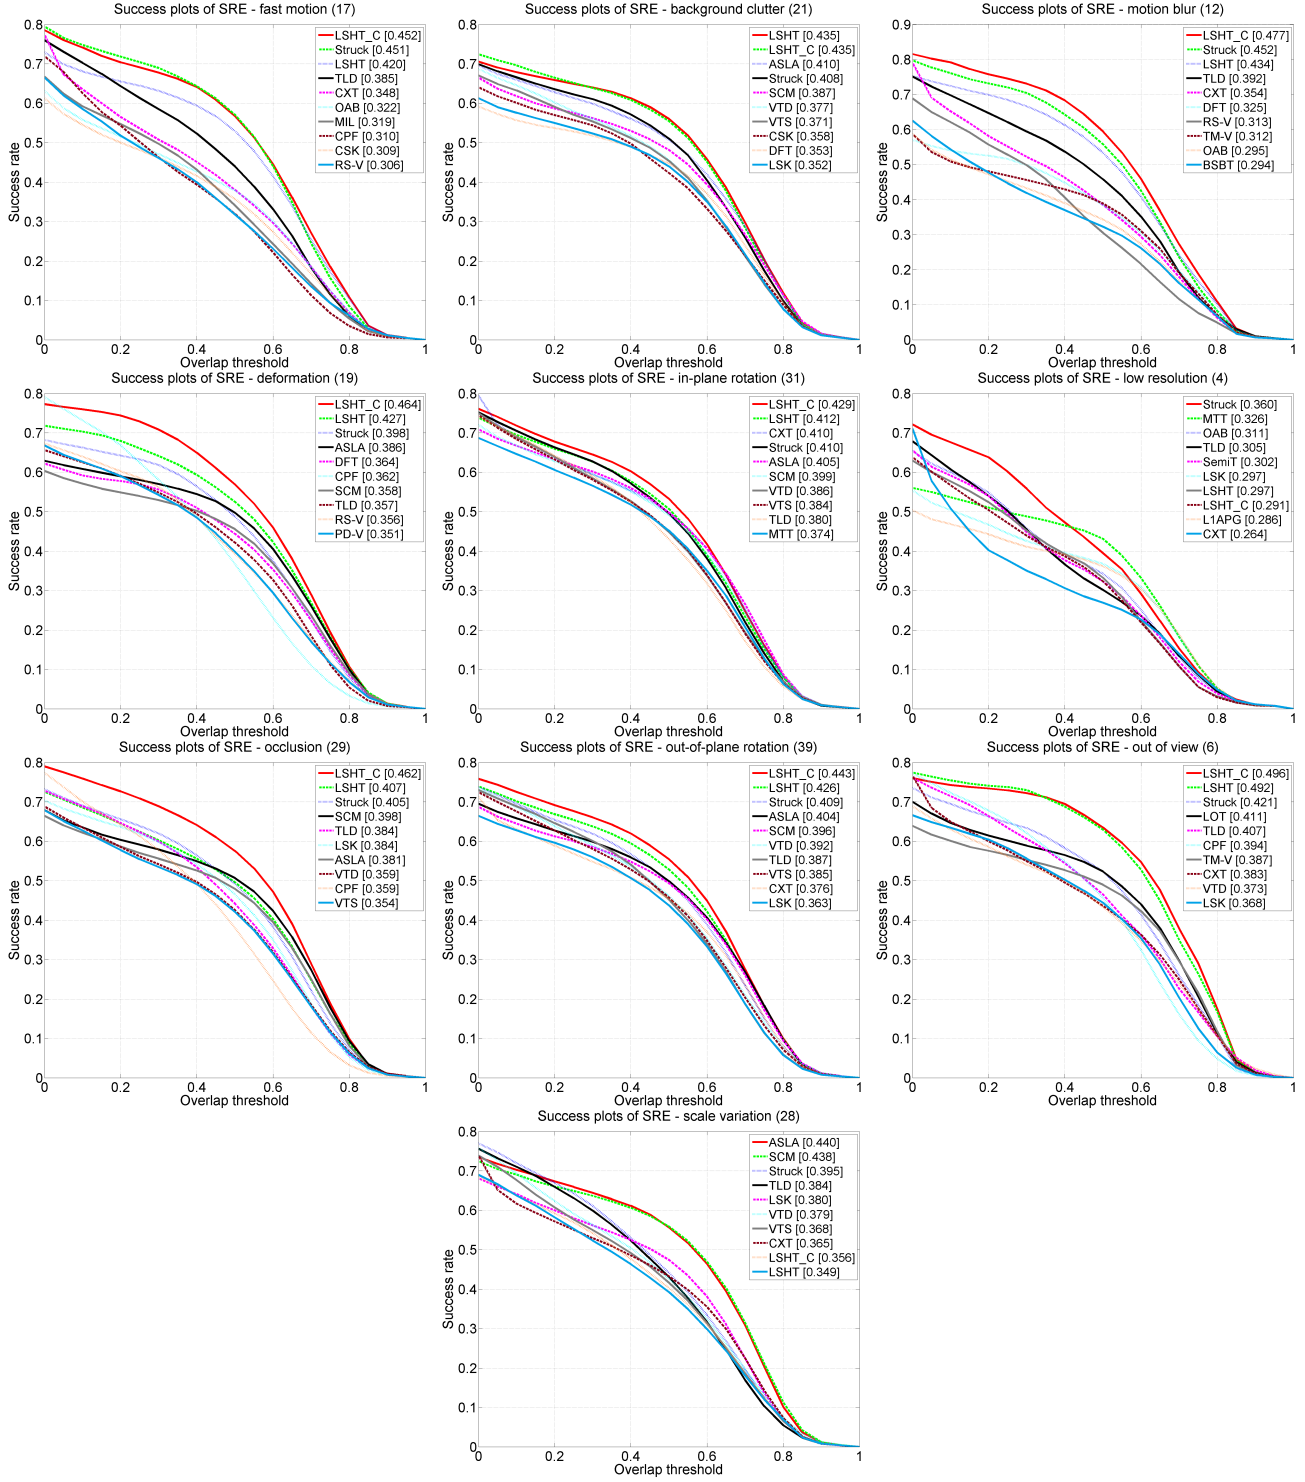


Fig. 4: The SRE plots under 10 challenging factors. The average AUC scores are shown in the legends.